

Reed relay

V2CXX1000



V3AXX1000





Contact Form	DPDT-CO			3PST-NO		
Contact Resistance	150 m Ω max. initial			100 m Ω max. initial		
Insulation Resistance	10 ⁹ Ω min.			10 ¹¹ Ω min.		
Power	3 VA max.			10 VA max.		
Switching Voltage	100 VDC max.			200 VDC max.		
Switching Current	0.25 Amps max.			0.5 Amps max.		
Minimum Breakdown Voltage	1500 VDC between coil & contact			1500 VDC between coil & contact		
Nominal Voltage (VDC)	5	12	24	5	12	24
Coil Resistance ±10% (V)	140	500	2150	140	500	2150
Must Operate (VDC)	3.75	9	18	3.75	9	18



Features

- Fully encapsulated
- Metal case for magnetic shield
- Pin layout in international standards metric pitch
- XX is nominal voltage option

Circuit Schematic
Top View

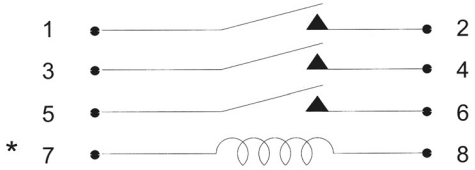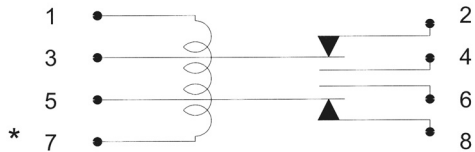

External Dimension
and PCB Layout
Unit: mm

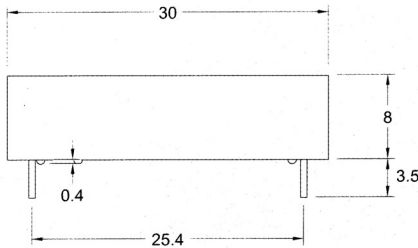

PCB Layout

