


DC COOLING FAN 7020
70x70x20 mm



- Construction:
 - Glass fiber reinforced plastic: impeller and housing PBT are UL 94V-0 rating
- Operating temperature:
 - Ball bearing -30 °C to +75 °C
 - Sleeve bearing -10 °C to +70 °C
- Insulation Resistance: 10 meg Ohm min. at 500 VDC (between frame and terminal)
- Dielectric Strength: 5 mA max. at 500 VAC 60Hz one minute (between frame and terminal)
- Function: auto-restart option, frequency generator signal option
- Weight: 70 grams

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Max. Air Flow		Max. Air Pressure		Noise
		VDC	V	A	W	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A
BP702012L SP702012L BS702012L	Ball Sleeve Ball&Sleeve	12	10.2-13.8	0.15	1.80	2900	0.69	24.5	2.3	0.09	26
BP702012M SP702012M BS702012M	Ball Sleeve Ball&Sleeve	12	10.2-13.8	0.24	2.88	4000	0.96	34.0	4.0	0.16	35.7
BP702012ML SP702012ML BS702012ML	Ball Sleeve Ball&Sleeve	12	10.2-13.8	0.18	2.16	3600	0.86	30.3	3.5	0.14	32.2
BP702012H SP702012H BS702012H	Ball Sleeve Ball&Sleeve	12	10.2-13.8	0.35	4.20	4600	1.12	39.5	5.4	0.21	39.8
BP702012HM SP702012HM BS702012HM	Ball Sleeve Ball&Sleeve	12	10.2-13.8	0.30	3.60	4300	1.02	36.2	5.7	0.22	37.7
BP702012HH SP702012HH BS702012HH	Ball Sleeve Ball&Sleeve	12	10.2-13.8	0.48	5.76	5000	1.22	43.2	7.0	0.28	41.1

Dimensions (mm)

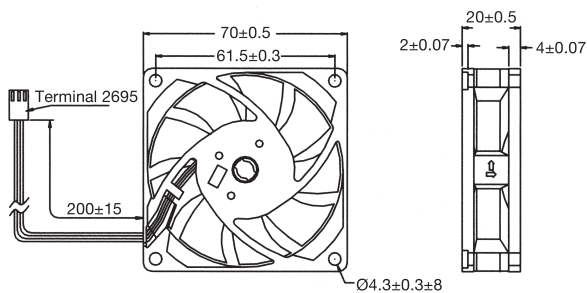

Performance Curve

