

**DC COOLING FAN 7025**  
70x70x25 mm




CE IP54

- Construction:
  - Glass fiber reinforced plastic: impeller and housing PBT are UL 94V-0 rating
- Operating temperature:
  - Ball bearing -30 °C to +75 °C
  - Sleeve bearing -10 °C to +70 °C
- Insulation Resistance: 10 meg Ohm min. at 500 VDC (between frame and terminal)
- Dielectric Strength: 5 mA max. at 500 VAC 60Hz one minute (between frame and terminal)
- Function: auto-restart option, frequency generator or rotation detection signal option
- Weight: 85 grams

Model No.	Bearing	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed R.P.M.	Max. Air Flow		Max. Air Pressure		Noise dB-A
		VDC	V	A	W		m³/min	CFM	mmH <sub>2</sub> O	IN H <sub>2</sub> O	
BP702512M SP702512M BS702512M	Ball Sleeve Ball&Sleeve	12	10.2-13.8	0.33	3.96	5000	1.28	45.31	9.88	0.39	42.7
BP702512H SP702512H BS702512H	Ball Sleeve Ball&Sleeve	12	10.2-13.8	0.52	6.24	5500	1.40	49.36	11.49	0.45	45.39
BP702512HH SP702512HH BS702512HH	Ball Sleeve Ball&Sleeve	12	10.2-13.8	0.62	7.44	6000	1.53	54	14	0.55	47.5

**Dimensions (mm)**

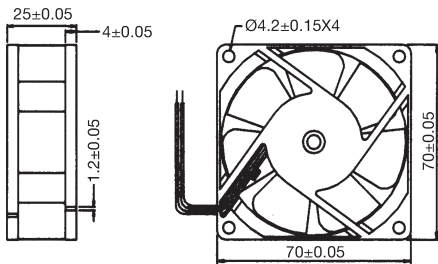

**Performance Curve**

