


**SWITCHING POWER SUPPLY
Metal Case**

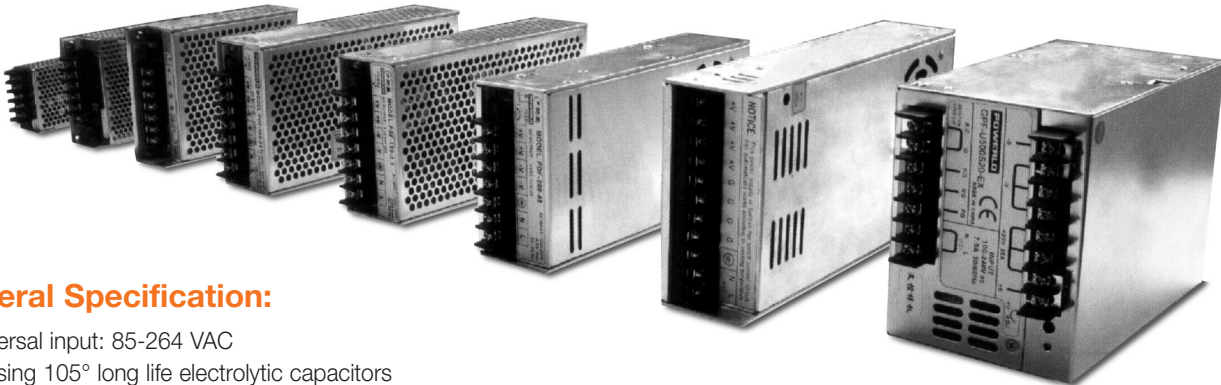

General Specification:

- Universal input: 85-264 VAC
- All using 105° long life electrolytic capacitors
- Operating temperature: -20 to 70°C
- 100% full load burn in test
- Compact Metal Case with Screw Terminal Block
- PFC Function
- Protections: short circuit /OLP/OVP
- Compliance to EN61000-3-2 (PFC)
- 2 years warranty
- Single, Double and Triple output

25W Single output

Model	DCOutput	
PD-25-S5	5V	5A
PD-25-S12	12V	2.1A
PD-25-S24	24V	1.05A
Dimensions: 79x51x28 mm		

50W Single output

Model	DCOutput	
PD-50-5	5V	8A
PD-50-12	12V	4A
PD-50-24	24V	2.2A
Dimensions: 99x82x35 mm		

60W Single output

Model	DCOutput	
PD-60-5	5V	10A
PD-60-12	12V	5A
PD-60-24	24V	2.5A
Dimensions: 129x98x38 mm		

100W Single output

Model	DCOutput	
PDF-100-5	5V	20A
PDF-100-12	12V	8.5A
PDF-100-24	24V	4.2A
Dimensions: 179x99x50 mm		

150W Single output

Model	DCOutput	
PDF-150-5	5V	30A
PDF-150-12	12V	12.5A
PDF-150-24	24V	6.3A
Dimensions: 179x99x50 mm		

320W Single output

Model	DCOutput	
PDF-320-5	5V	55A
PDF-320-12	12V	25A
PDF-320-24	24V	13A
Dimensions: 226x115x50 mm		



RoHS

CB



CE

FC

cULus



ISO 9001
CERTIFICATED

ISO 14001
CERTIFICATED

Different Power or DC Output Voltage available on request